


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JGSM402	Power:	7W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Built-in	Installation Method:	surface Mounted
Luminaire Luminous Flux:	362.8 Lumen	Luminous Efficiency:	60.4 Lumen/W
Structure:	Fixed	Beam Angle:	☐ 20° ☐ 25° ☐ 30° ☐ 60°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	/	Cutout:	/
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control: ☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512			
Finish: ☐ WH ☐ BK ☐ WH+BK ☐ WH+GD ☐ BK+GD ☐ BH+CH			

Photometric and Luminous Intensity Distribution Curve

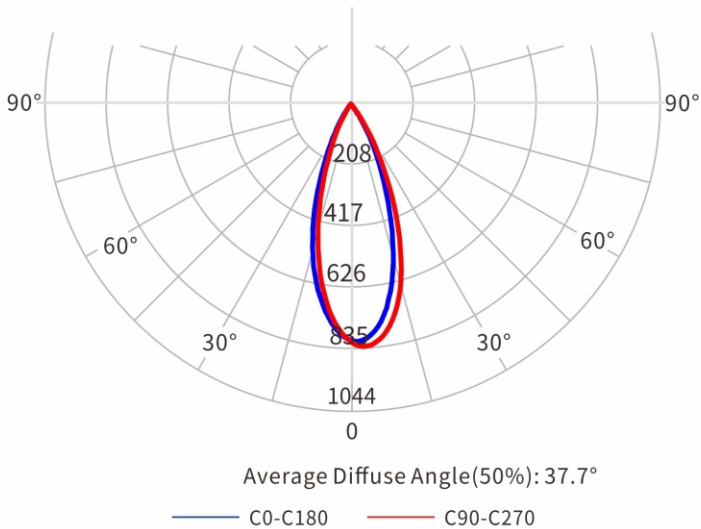

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	813.21	0.68/0.68	0.4	341.12
2.0	203.3	1.37/1.36	1.5	85.28
3.0	90.36	2.05/2.04	3.4	37.90
4.0	50.83	2.74/2.72	6.0	21.32
5.0	32.56	3.42/3.40	9.3	13.64