


Technical Data Sheet (TDS):

Specifications

Model:	ST-JGSQ202	Power:	4W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	224.7 Lumen	Luminous Efficiency:	44.94 Lumen/W
Structure:	Adjustableangle	Beam Angle:	☐ 20° ☐ 25° ☐ 30° ☐ 60°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	/	Cutout:	55*45mm
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512
Finish:	☐ WH ☐ BK ☐ WH+BK ☐ WH+GD ☐ BK+GD ☐ BH+CH

Photometric and Luminous Intensity Distribution Curve

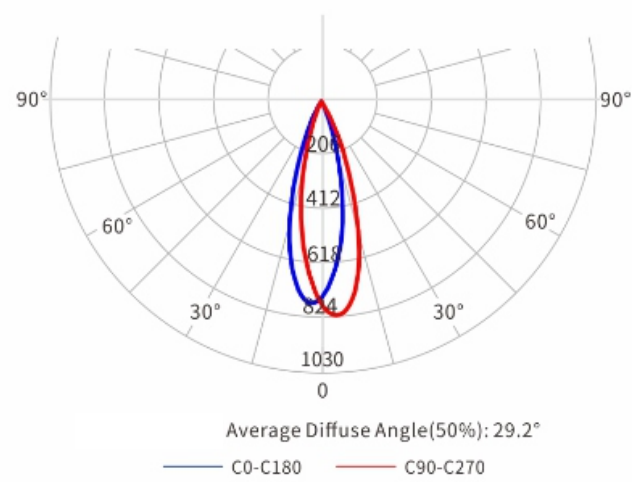

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	157.7	0.52/0.52	0.2	341.77
2.0	189.43	1.04/1.05	0.9	85.44
3.0	84.19	1.56/1.57	2.0	37.97
4.0	47.36	2.08/2.10	3.6	21.36
5.0	30.31	2.59/2.62	5.6	13.67