


Technical Data Sheet (TDS):

Specifications

Model:	ST-JGQ1202W	Power:	30W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥90	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Trimless
Luminaire Luminous Flux:	2324 Lumen	Luminous Efficiency:	77 Lumen/W
Structure:	Adjustable angle	Beam Angle:	<input type="checkbox"/> 10° <input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4200K <input type="checkbox"/> 5700K
Dimensions:	433*95*56mm	Cutout:	435*55mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	<input type="checkbox"/> (Non-Dim) <input type="checkbox"/> (Triac) <input type="checkbox"/> DALI <input type="checkbox"/> 0-10V <input type="checkbox"/> PWM <input type="checkbox"/> DMX512		
Finish:	<input type="checkbox"/> WH <input type="checkbox"/> BK		

Photometric and Luminous Intensity Distribution Curve

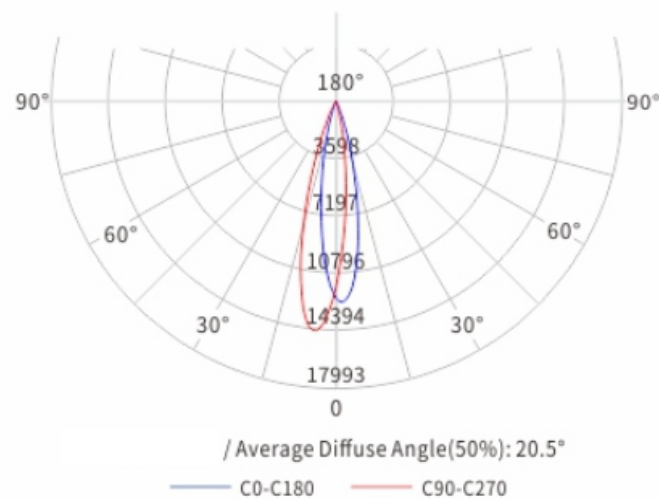

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	12289.66	0.37/0.36	0.1	6144.67
2.0	3071.67	0.73/0.72	0.5	1536.17
3.0	1365.18	1.10/1.07	1.1	682.74
4.0	767.92	1.47/1.43	1.9	384.04
5.0	491.47	1.83/1.79	2.7	245.79