


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JG-XG03	Power:	9W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	458 Lumen	Luminous Efficiency:	50 Lumen/W
Structure:	Adjustable	Beam Angle:	☐ 10° ☐ 15° ☐ 24° ☐ 36° ☐ 10*45°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	44*44*55mm	Cutout:	/
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH ☐ BK ☐ WH+CH ☐ WH+BK ☐ WH+GD ☐ Bk+GD		

Photometric and Luminous Intensity Distribution Curve

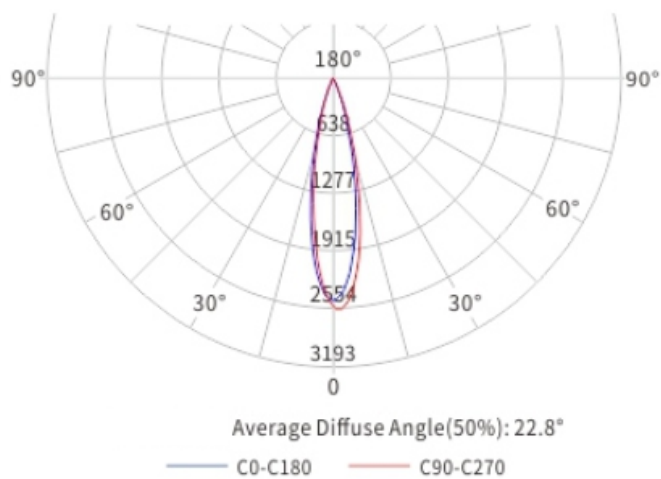

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2456.17	0.41/0.40	0.1	1319.81
2.0	614.04	0.81/0.81	0.5	329.95
3.0	272.91	1.22/1.21	1.2	146.65
4.0	153.51	1.62/1.61	2.1	82.49
5.0	98.25	2.03/2.02	3.2	52.79