


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JG10	Power:	80W
Light Source:	Bridgelux	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	6134 Lumen	Luminous Efficiency:	76 Lumen/W
Structure:	Fixed	Beam Angle:	□24°
IP Rating:	IP 20	Colour Temperature:	□3000K □4000K
Dimensions:	Ø273*263mm	Cutout:	Ø260mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	□ (Non-Dim) □ (Triac) □ DALI □ 0-10V □ PWM □ DMX512		
Finish:	□ WH+CH		

Photometric and Luminous Intensity Distribution Curve

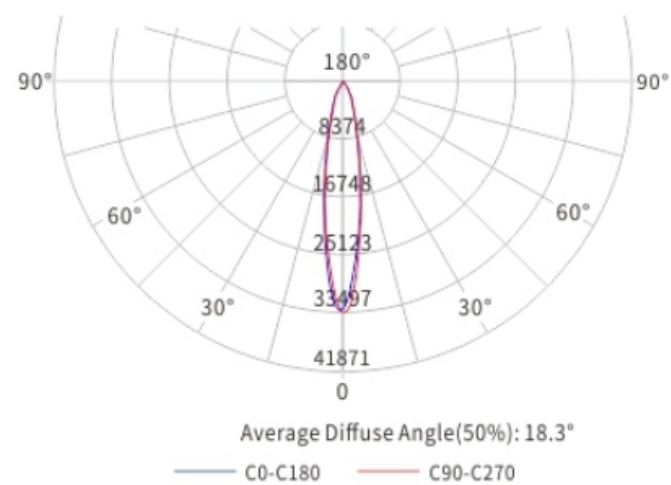

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	32997.95	0.32/0.32	0.1	15058.51
2.0	8249.49	0.65/0.64	0.3	3764.63
3.0	3666.44	0.97/0.95	0.7	1673.17
4.0	2062.37	1.30/1.27	1.3	941.16
5.0	1319.92	1.62/1.59	2.0	602.34