


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JG39	Power:	12W
Light Source:	Bridgelux	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	481 Lumen	Luminous Efficiency:	53 Lumen/W
Structure:	Adjustable angle	Beam Angle:	☐ 4° ☐ 10° ☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K ☐ 5700K
Dimensions:	Ø82*75mm	Cutout:	Ø75mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH ☐ BK ☐ WH+CH ☐ WH+BK ☐ WH+GD ☐ Bk+GD		

Photometric and Luminous Intensity Distribution Curve

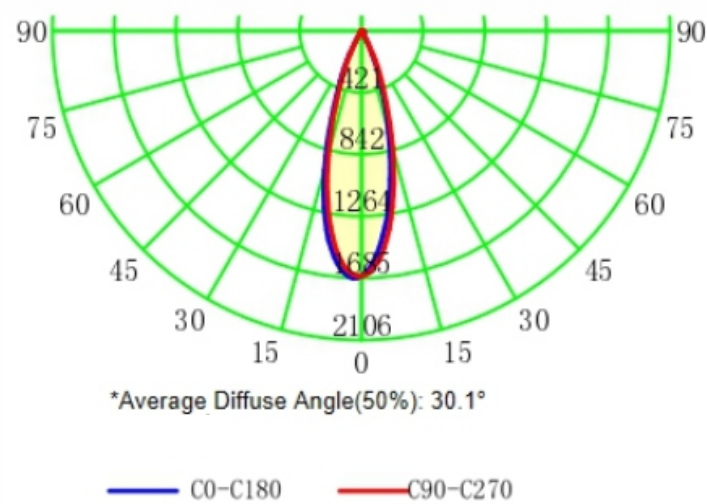

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1670.50	0.54/0.54	0.2	1109.47
2.0	417.63	1.07/1.08	0.9	277.37
3.0	185.61	1.61/1.63	2.1	123.27
4.0	104.41	2.14/2.17	3.7	69.34
5.0	66.82	2.68/2.71	5.7	44.38

LED   RoHS    