

Technical Data Sheet (TDS):


Specifications

Model:	STLD-B08103	Power:	10W
Light Source:	Luminus	Input Voltage:	DC24V
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Surface Mounted
Luminaire Luminous Flux:	Lumen	Luminous Efficiency:	Lumen/W
Structure:	Fixed	Beam Angle:	/
IP Rating:	IP 20	Colour Temperature:	Bicolor temperature
Dimensions:	Plate width:8mm 10/rollup	Cutout:	/
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: (Non-Dim) (Triac) DALI 0-10V PWM DMX512

Finish: /

Photometric and Luminous Intensity Distribution Curve

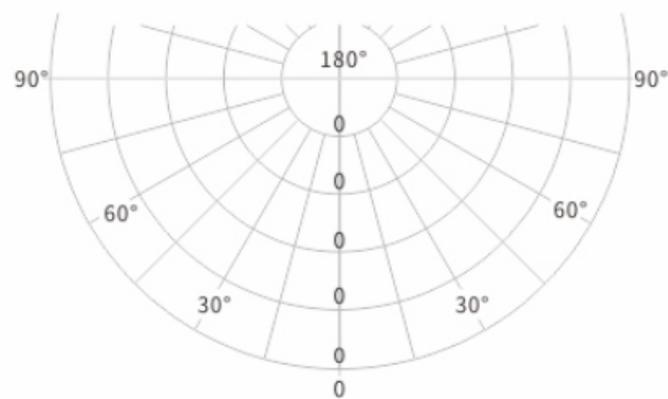

Average Diffuse Angle(50%):/°
 — C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	-	-	-	-
2.0	-	-	-	-
3.0	-	-	-	-
4.0	-	-	-	-
5.0	-	-	-	-

LED