

Technical Data Sheet (TDS):


Specifications

Model:	ST-RZF05	Power:	6W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	522 Lumen	Luminous Efficiency:	87 Lumen/W
Structure:	Adjustable angle	Beam Angle:	☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 5700K
Dimensions:	Ø89*58.5mm	Cutout:	Ø75mm
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: ☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512

Finish: ☐ WH ☐ BS

Photometric and Luminous Intensity Distribution Curve

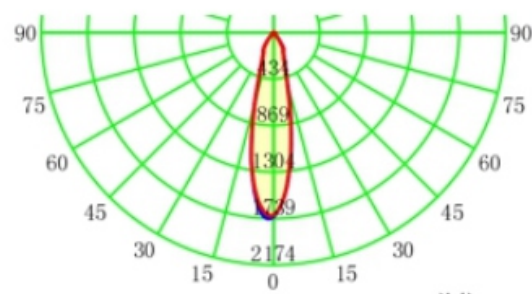

*Average Diffuse Angle(50%): 24.1°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1721.14	0.43/0.43	0.1	880.35
2.0	430.29	0.85/0.86	0.3	391.27
3.0	191.24	1.28/1.29	1.3	97.82
4.0	107.57	1.70/1.72	2.3	55.02
5.0	68.85	2.13/2.15	3.6	35.21

LED   RoHS    