


Technical Data Sheet (TDS):

Specifications			
Model:	ST-T5T1000	Power:	14W
Light Source:	2835	Input Voltage:	DC24V
Colour Rendering Index:	Ra≥90	Main Material:	Aluminium+PC
Driver:	Remote	Installation Method:	Open-mounted
Luminaire Luminous Flux:	1077 Lumen	Luminous Efficiency:	77 Lumen/W
Structure:	Fixed	Beam Angle:	☐ 120°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 4200K ☐ 5700K
Dimensions:	985*22*33mm	Cutout:	/
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ SG		

Photometric and Luminous Intensity Distribution Curve

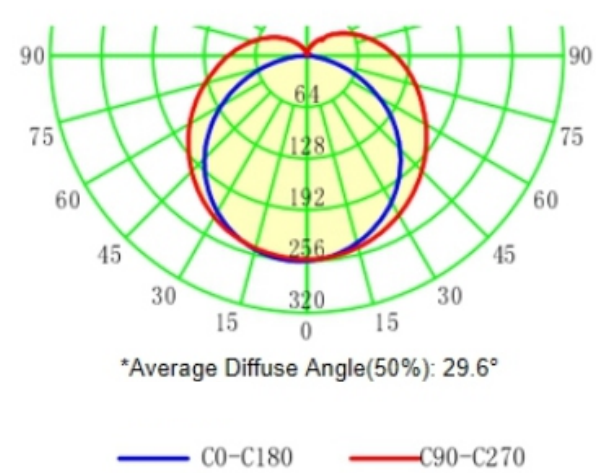

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	255.60	3.04/10.65	41.9	10.05
2.0	63.90	6.08/21.30	167.5	2.51
3.0	28.40	9.11/31.95	376.9	1.12
4.0	15.98	12.15/42.60	670.0	0.63
5.0	10.22	15.19/53.25	1046.8	0.40

LED   RoHS    