


Technical Data Sheet (TDS):

Specifications			
Model:	ST-LS25	Power:	12W
Light Source:	Bridgelux	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	631 Lumen	Luminous Efficiency:	53 Lumen/W
Structure:	Adjustable	Beam Angle:	☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4200K ☐ 5700K
Dimensions:	Ø92*100mm	Cutout:	Ø80mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH		

Photometric and Luminous Intensity Distribution Curve

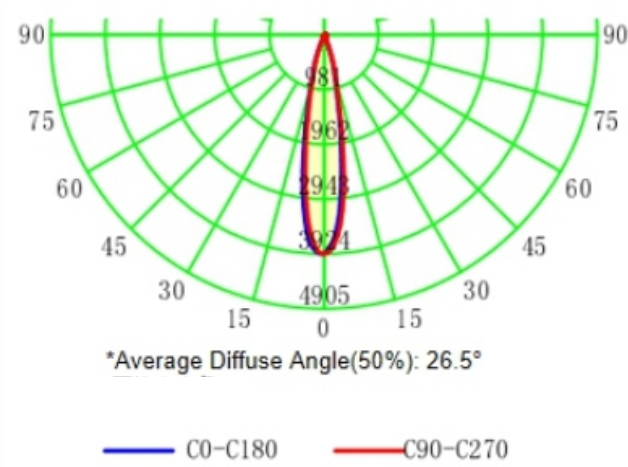

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	3915.86	0.34/0.34	0.1	2624.97
2.0	978.97	0.69/0.69	0.4	656.24
3.0	435.10	1.03/1.03	0.8	291.66
4.0	244.74	1.38/1.37	1.5	164.06
5.0	156.63	1.72/1.72	2.3	105.00

LED RoHS