


Technical Data Sheet (TDS):

Specifications			
Model:	ST-SXF01-600-BT	Power:	10W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	696 Lumen	Luminous Efficiency:	69 Lumen/W
Structure:	Fixed	Beam Angle:	☐ 120°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	600*14*25mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH ☐ BK		

Photometric and Luminous Intensity Distribution Curve

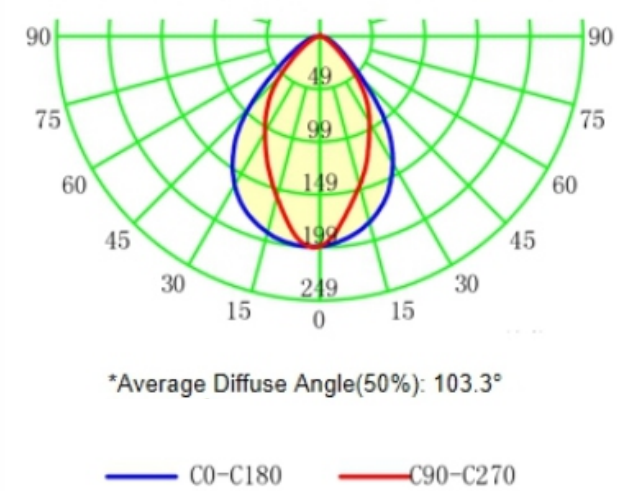

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	274.75	2.71/2.36	5.1	54.57
2.0	68.69	5.43/4.71	20.4	13.64
3.0	30.53	8.14/7.07	45.9	6.06
4.0	17.17	10.85/9.42	81.6	3.41
5.0	10.99	13.57/11.78	127.5	2.18

LED   RoHS    