


Technical Data Sheet (TDS):

Specifications			
Model:	ST-SXS05-BT	Power:	6W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	400 Lumen	Luminous Efficiency:	66 Lumen/W
Structure:	Adjustable angle	Beam Angle:	☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 4000K
Dimensions:	33.5*110mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control: ☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512			
Finish: ☐ WH ☐ BK			

Photometric and Luminous Intensity Distribution Curve

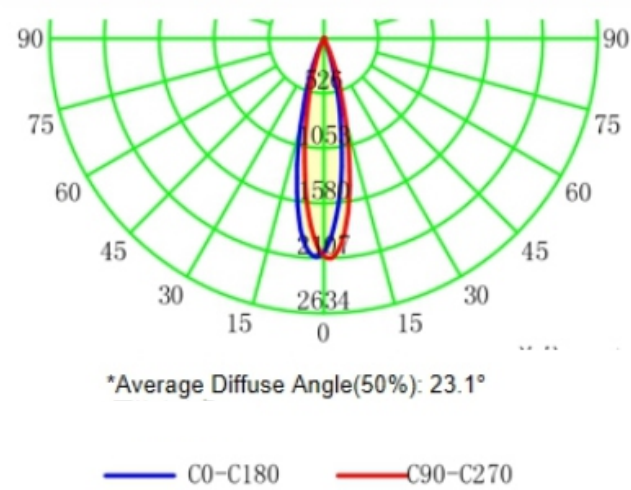

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2050.14	0.41/0.41	0.1	925.77
2.0	512.53	0.82/0.82	0.5	231.44
3.0	227.79	1.22/1.23	1.2	102.86
4.0	128.13	1.63/1.64	2.1	57.86
5.0	82.01	2.04/2.04	3.4	37.03

LED RoHS