


Technical Data Sheet (TDS):

Specifications			
Model:	ST-XMS04-1-BT	Power:	9W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	396 Lumen	Luminous Efficiency:	44 Lumen/W
Structure:	Adjustable angle	Beam Angle:	☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	Ø33.5*110mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ BK		

Photometric and Luminous Intensity Distribution Curve

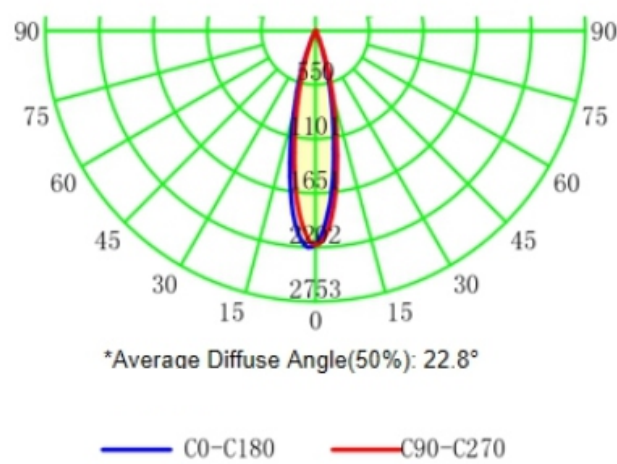

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2175.99	0.41/0.40	0.1	1146.43
2.0	544.00	0.81/0.80	0.5	286.61
3.0	241.78	1.22/1.20	1.2	127.38
4.0	136.00	1.63/1.61	2.1	71.65
5.0	87.04	2.03/2.01	3.2	45.86

LED   RoHS    