

Technical Data Sheet (TDS):


Specifications

Model:	ST-XMS03-220-BT	Power:	10W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	734 Lumen	Luminous Efficiency:	73 Lumen/W
Structure:	Adjustable angle	Beam Angle:	□24°
IP Rating:	IP 20	Colour Temperature:	□2700K □3000K □3500K □4000K
Dimensions:	220*22.3*157mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—

Intelligent Control: ☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512

Finish: ☐ BK

Photometric and Luminous Intensity Distribution Curve

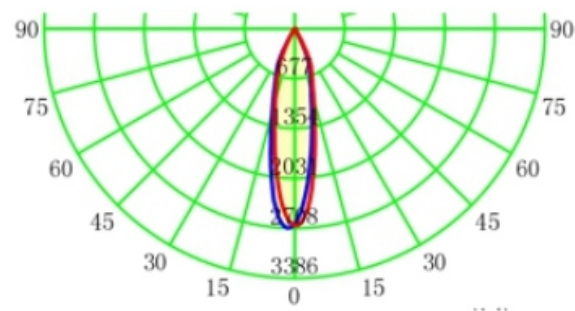

*Average Diffuse Angle(50%): 23.7°

— C0-C180 — C90-C270

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	2655.39	0.42/0.42	0.1	1370.30
2.0	663.85	0.83/0.84	0.6	342.57
3.0	295.04	1.25/1.26	1.2	152.26
4.0	165.96	1.67/1.68	2.2	85.64
5.0	106.22	2.09/2.11	3.5	54.81

LED CCC CE RoHS CQC F