

Technical Data Sheet (TDS):


Specifications

| | | | |
|--------------------------|----------------|----------------------|--|
| Model: | ST-XMZ01-round | Power: | 3W |
| Light Source: | Luminus | Input Voltage: | AC220~240V,50/60Hz |
| Colour Rendering Index: | Ra≥95 | Main Material: | Aluminium |
| Driver: | Remote | Installation Method: | Recessed |
| Luminaire Luminous Flux: | 797 Lumen | Luminous Efficiency: | 72 Lumen/W |
| Structure: | Fixed | Beam Angle: | <input type="checkbox"/> 24° |
| IP Rating: | IP 20 | Colour Temperature: | <input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K |
| Dimensions: | Ø31*400mm | Cutout: | — |
| Insulation Class: | Class 3 | Optics Accessories: | — |

Intelligent Control: (Non-Dim) (Triac) DALI 0-10V PWM DMX512

Finish: BK

Photometric and Luminous Intensity Distribution Curve

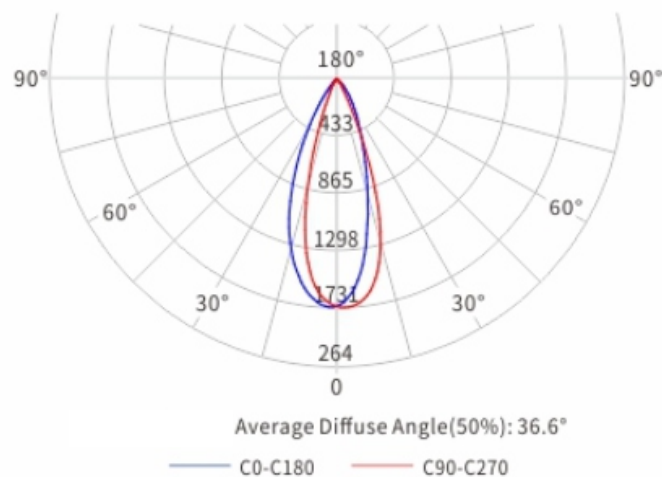

| H(m) | E0(lx) | Dh/Dv_B(m) | S_B(sq.m) | Eav_B(lx) |
|------|---------|------------|-----------|-----------|
| 1.0 | 1720.76 | 0.70/0.62 | 0.4 | 723.86 |
| 2.0 | 430.19 | 1.40/1.24 | 1.4 | 180.96 |
| 3.0 | 191.20 | 2.10/1.86 | 3.2 | 80.43 |
| 4.0 | 107.55 | 2.81/2.48 | 5.6 | 45.24 |
| 5.0 | 68.83 | 3.51/3.10 | 8.8 | 28.95 |