


Technical Data Sheet (TDS):

Specifications

Model:	ST-XMS01-650	Power:	21W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	1944 Lumen	Luminous Efficiency:	85 Lumen/W
Structure:	Fixed	Beam Angle:	<input type="checkbox"/> 24°
IP Rating:	IP 20	Colour Temperature:	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K
Dimensions:	660*22.3*43.8mm	Cutout:	—
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	<input type="checkbox"/> (Non-Dim) <input type="checkbox"/> (Triac) <input type="checkbox"/> DALI <input type="checkbox"/> 0-10V <input type="checkbox"/> PWM <input type="checkbox"/> DMX512		
Finish:	<input type="checkbox"/> BK		

Photometric and Luminous Intensity Distribution Curve

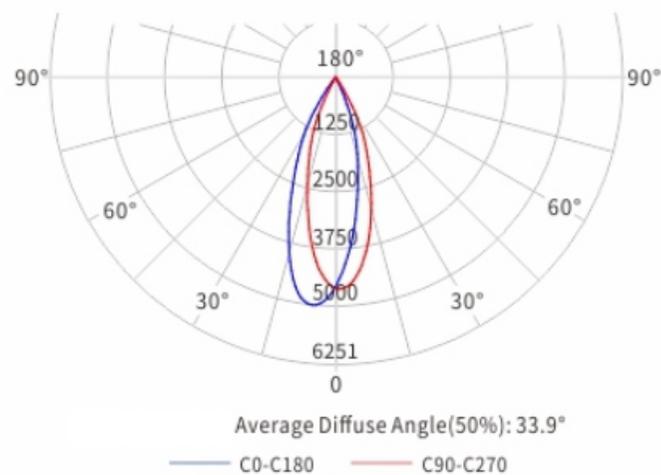

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1652.37	0.44/0.47	0.2	866.42
2.0	413.09	0.88/0.93	0.8	216.61
3.0	183.60	1.31/1.40	1.7	96.27
4.0	103.27	1.75/1.87	3.0	54.15
5.0	66.09	2.19/2.34	4.7	34.66