


Technical Data Sheet (TDS):

Specifications			
Model:	ST-RZY40	Power:	9W
Light Source:	Luminus	Input Voltage:	AC220~240V,50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	709 Lumen	Luminous Efficiency:	78 Lumen/W
Structure:	Fixed	Beam Angle:	☐ 120°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 4000K ☐ 5700K
Dimensions:	Ø130*62mm	Cutout:	Ø110mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH ☐ HL		

Photometric and Luminous Intensity Distribution Curve

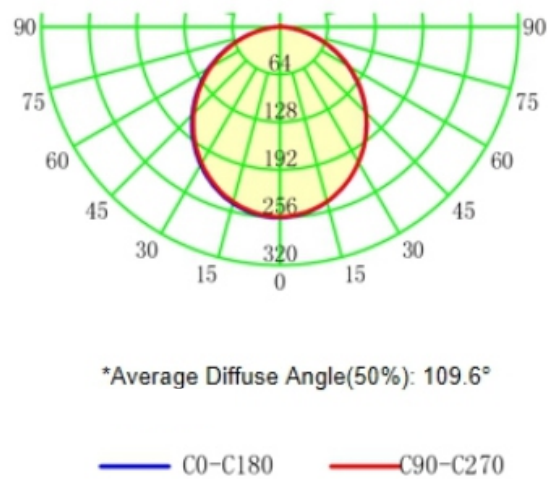

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	256.61	2.84/2.84	6.3	47.49
2.0	64.15	5.67/5.67	25.3	11.87
3.0	28.51	8.51/8.51	56.9	5.28
4.0	16.04	11.35/11.34	101.1	2.97
5.0	10.26	14.18/14.18	158.0	1.90

LED RoHS