


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JGQ104W	Power:	7W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥90	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Trimless
Luminaire Luminous Flux:	273 Lumen	Luminous Efficiency:	39 Lumen/W
Structure:	Adjustable angle	Beam Angle:	☐ 10° ☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4200K ☐ 5700K
Dimensions:	92*92*115mm	Cutout:	85*85mm
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH ☐ WH+CH ☐ WH+BK ☐ WH+GD		

Photometric and Luminous Intensity Distribution Curve

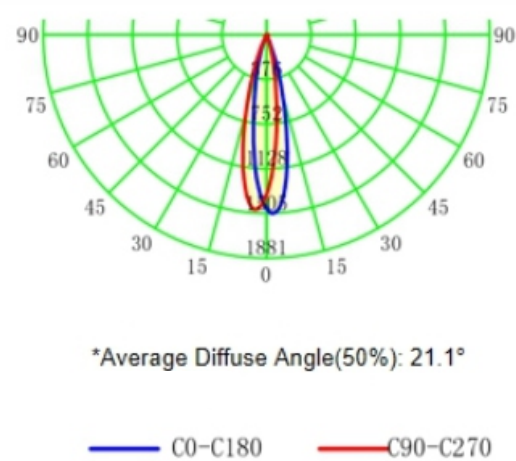

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1466.07	0.37/0.37	0.1	668.78
2.0	366.52	0.74/0.74	0.5	167.2
3.0	162.9	1.12/1.11	1.1	74.31
4.0	91.63	1.49/1.49	1.9	41.80
5.0	58.64	1.86/1.86	2.9	26.75

LED RoHS