


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JG-XF04	Power:	10W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	621 Lumen	Luminous Efficiency:	62 Lumen/W
Structure:	Fixed	Beam Angle:	☐ 120°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 4000K
Dimensions:	177.5*44*55mm	Cutout:	/
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ WH ☐ BK		

Photometric and Luminous Intensity Distribution Curve

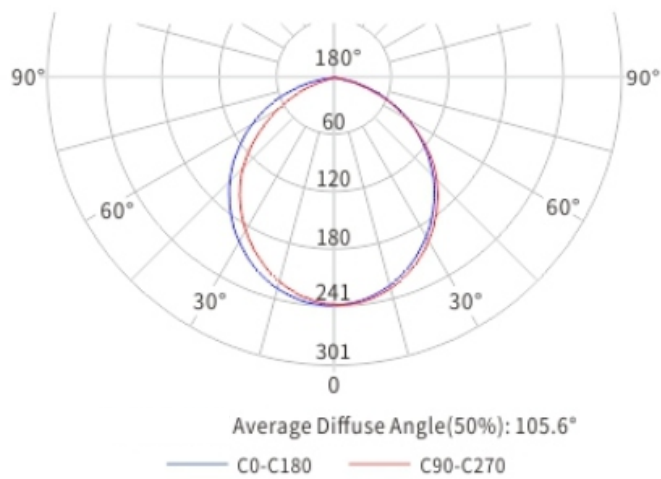

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	240.87	2.76/2.51	5.5	48.02
2.0	60.22	5.53/5.03	22.1	12.01
3.0	26.76	8.29/7.54	49.6	5.34
4.0	15.05	11.06/10.05	88.2	3.00
5.0	9.63	13.82/12.56	137.8	1.92