


Technical Data Sheet (TDS):

Specifications			
Model:	ST-JG-XG05	Power:	5W
Light Source:	Luminus	Input Voltage:	AC 220~240V, 50/60Hz
Colour Rendering Index:	Ra≥95	Main Material:	Aluminium
Driver:	Remote	Installation Method:	Recessed
Luminaire Luminous Flux:	264 Lumen	Luminous Efficiency:	52.8 Lumen/W
Structure:	Adjustable	Beam Angle:	☐ 15° ☐ 24° ☐ 36°
IP Rating:	IP 20	Colour Temperature:	☐ 2700K ☐ 3000K ☐ 3500K ☐ 4000K
Dimensions:	Ø60*70mm	Cutout:	/
Insulation Class:	Class 3	Optics Accessories:	—
Intelligent Control:	☐ (Non-Dim) ☐ (Triac) ☐ DALI ☐ 0-10V ☐ PWM ☐ DMX512		
Finish:	☐ BK ☐ WH+BK		

Photometric and Luminous Intensity Distribution Curve

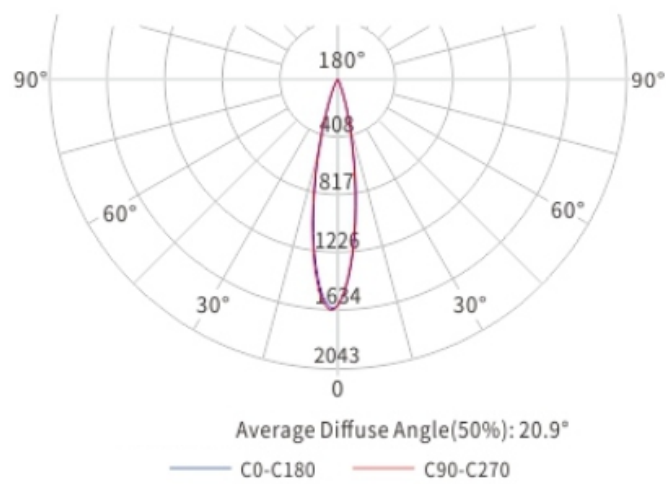

H(m)	E0(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	1595.43	0.37/0.37	0.1	881.36
2.0	398.86	0.74/0.74	0.2	391.72
3.0	177.27	1.11/1.11	1.0	97.93
4.0	99.71	1.48/1.48	1.8	55.08
5.0	63.82	1.84/1.85	2.8	35.25